


SELF POWERED DEVICE

NOTE: THIS IS A LOW POWER, LOW VOLTAGE DEVICE (CLASS 2). USE ON INSULATED CONDUCTORS ONLY!

CT BREAKDOWN TEST VOLTAGE 2500VAC

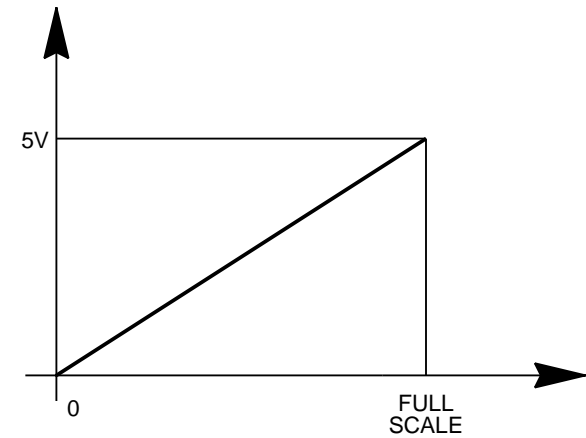

LINEAR OUTPUT, RMS CALIBRATED TO 50 or 60 Hz SINE WAVE.

ACCURACY: BETTER THAN 1% FS

ELCOR Technologies Inc.

DRAWN: PCK	TITLE: i-Snail-V: Current Transducer with 0-5VDC Output	CODE:
CHECKED: CKK		
DATE: 7/13/2004	FILE: ..\tscad_drawings\i-Snail-V.t4g	SHEET: 1 OF 1